



### NPP915

The optimal management of electrical power systems is based in particular on the reliability, availability and communication skills of protection, measurement and automation devices.

NPP915 is a novel power monitoring IED for any demanding metering and power monitoring applications. The NPP915 offers a unique combination of high accuracy power and energy measurement of class 0.2S with dynamic measurement range up to 250A secondary current. Freely configurable data logging, programmable logic and disturbance recorder features allows for variety of power quality monitoring applications.

The NPP915 communicates using various protocols including IEC 61850 substation communication standard.



- Accuracy class 0.2 according to IEC 62053-22
- Frequency independent measurement - patented frequency tracking algorithm guarantees measurement accuracy at 6-75Hz
- Power quality analysis - harmonics, THD and disturbance recording
- Powerful disturbance recorder with up to 64 samples per cycle sampling rate
- Dynamic measuring range up to 250A secondary – effective disturbance recording when coupled to protection CT
- Programmable logic functions
- Extensive data logging capability

*Our energy at your service*

## CHARACTERISTICS

### Measuring and monitoring

- Phase and residual currents (IL1, IL2, IL3, IO1, IO2)
- Voltage measurements (UL1-UL3, U12-U31, U0, SS)
- Current and voltage harmonics (up to 31st)
- Current THD
- Frequency (f)
- Power (P, Q, S, pf)
- Energy (E+, E-, Eq+, Eq-)

### Control

- 8 setting groups

### Power quality and data logging

- Voltage and current harmonics up to 31st
- Current total harmonic distortion (THD)
- Disturbance recorder (3.2 kHz)
- Freely configurable data logging in flash memory

### Hardware

- Current inputs: 5
- Voltage inputs: 4
- Digital inputs: 3 (standard)
- Output relays: 5+1 (standard)

### Options (3 slots)

- Digital inputs optional: +8 per card
- Digital outputs optional: +5 per card (2 cards max.)
- 2 x mA input + 6-8 x RTD input (2 cards max.)
- Communication media (specified below)

### Event recording

- Non-volatile disturbance records: 100
- Non-volatile event records: 10000

### Communication media


- RJ 45 Ethernet 100Mb (front standard)
- Double LC Ethernet 100Mb (option)
- RS232 + serial fibre PP/PG/GP/GG (option)

### Communication protocols standard

- IEC 61850
- IEC 60870-5-103/101/104
- Modbus RTU, Modbus TCP/IP
- DNP 3.0, DNP 3.0 over TCP/IP
- SPA


### Case

- H, W, D without terminal 177x127x174 mm
- H, W, D with terminal 177x127x189 mm (casing height 4U, width 1/4 rack, depth 210 mm)
- H, W of front plate 177x127 mm
- H, W of cut out 160x106 mm

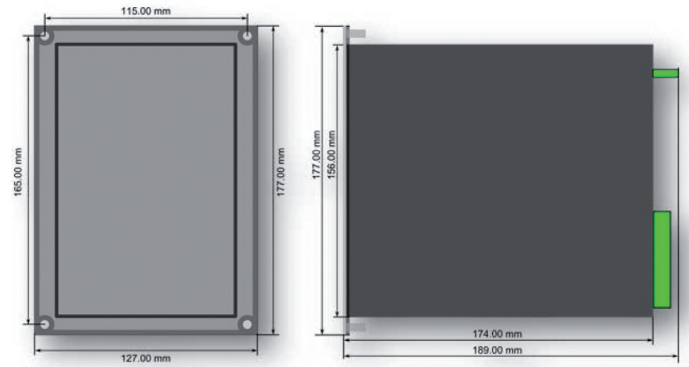

### SMART9 - integrated software

Our user friendly SMART9 (Setting, Measurement, Analysis, Recording, Time-saving) configuration software helps the user get the best from NP900 series relays.

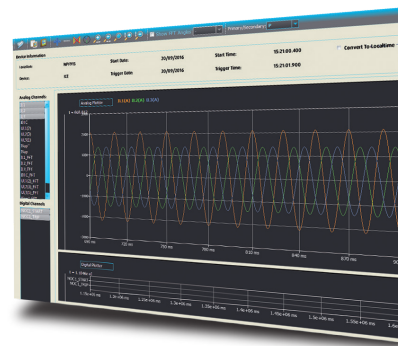

The specifications and drawings given are subject to change and are not binding unless confirmed by our specialists.



## CEE Relays Ltd

87C Whitby Road, Slough, SL1 3DR (Registered Office)

Tel: +44 1753 576477 Fax: +44 1753 825661

Web: [www.ceerelays.co.uk](http://www.ceerelays.co.uk)



A939F